


Green Concentrate

252-1001

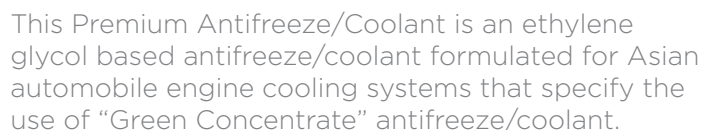

MIX WITH DISTILLED WATER TO REQUIRED LEVEL OF DILUTION.

This Premium Antifreeze/Coolant provides superior corrosion and rust protection of water-cooled automobile engine cooling system components and meets ASTM D-3306.

May also be used in: Acura, Honda and Suzuki

ATTRIBUTES	
APPEARANCE	Green
DENSITY AT 20°C	1.13 g/cm ³
FREEZING POINT	<-15°C/<5°F
FLASH POINT	126°C/259°F
BOILING POINT	>149°C/>300°F
WATER CONTENT	<5%
PH-VALUE	7.5
MIXING RATIO W/ WATER	50/50
BOILING POINT W/ WATER	129°C/265°F**
FREEZING POINT W/ WATER	-37°C/-34°F

***Using a 15 psi (103 kPa) pressure cap at sea level*

BECKARNLEY®
Foreign Nameplate Specialists



©2018 Federal-Mogul Motorparts LLC. Beck/Arnley is a trademark owned by Federal-Mogul LLC or one or more of its subsidiaries in one or more countries. All other trademarks shown are the property of their respective owners. RA18XXXX